
ENOLGAS
www.enolgasusa.com

Enolgas SafeFlex™ Total Gas System

18035 SERIES
REDUCING COUPLING PRESS X PRESS

Item# Submitted: _____
Job Name: _____
Location: _____
Engineer: _____
Contractor: _____
PO#: _____
TAG: _____



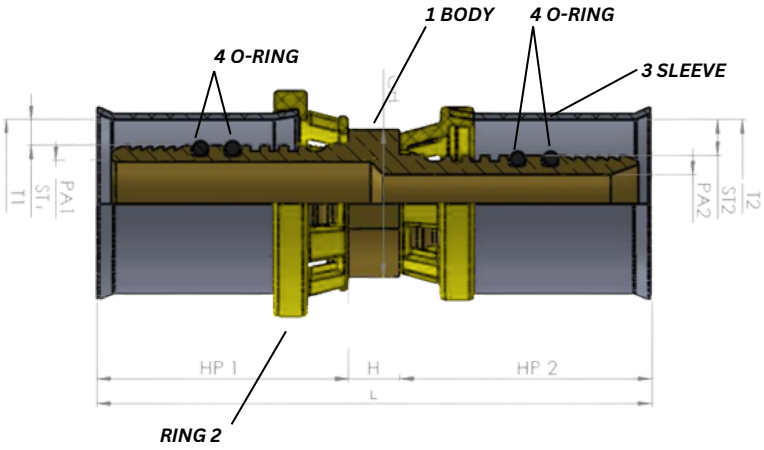

MADE IN ITALY

SPECIFICATION

- BRASS BODY
- SIZES: 16MM - 63MM (REDUCING)
- CONNECTION: PRESS x PRESS, REDUCING COUPLING
- STANDARDS: UNI 11344, ISO 17484-1, UNI/TS 11343, UNI 7129, DM 16/04/08
- MAX. OPERATING PRESSURE: 0.5 BAR
- DIRECTION OF FLOW: IN BOTH WAYS
- TEMPERATURE RANGE: -4°F TO 158°F
- APPLICATION: DOMESTIC & COMMERCIAL GAS DISTRIBUTION (MULTILAYER PIPE SYSTEMS)

COMPONENTS

N°	DESCRIPTION	MATERIAL
1	BODY	BRASS (CW614N / CW617N)
2	RING	NYLON
3	SLEEVE	AISI 304 (STAINLESS STEEL)
4	O-RING	HNBR 70

TONGS DIAMETER

(Ø) TUBE	PROFILE
16	H – TH-U
20	H – TH-U
26	H – TH
32	H – TH-U
40	H – TH-U
50	TH
63	TH

DIMENSIONS

MM

CODE	MAJOR SIDE				MINOR SIDE				L	CH	H
	T1 (Ø)	ST1	PA1	HP1	T2 (Ø)	ST2	PA2	HP2			
18035-020-016	20	2.0	10.00	29.50	16	2.0	7.00	29.50	65.00	17	6.00
18035-026-016	26	3.0	14.60	29.50	16	2.0	7.00	29.50	65.00	22	6.00
18035-026-020	26	3.0	14.60	29.50	20	2.0	10.00	29.50	65.00	22	6.00
18035-032-016	32	3.0	20.00	34.50	16	2.0	7.00	29.50	73.00	30	9.00
18035-032-020	32	3.0	20.00	34.50	20	2.0	10.00	29.50	73.00	30	9.00
18035-032-026	32	3.0	20.00	34.50	26	3.0	14.60	29.50	73.00	30	9.00
18035-050-032	50	4.0	34.50	50.00	32	3.0	20.00	34.50	100.50	48	16.00
18035-063-050	63	4.5	44.00	56.00	50	4.0	34.50	50.00	128.00	62	22.00