



## 12417 SERIES

### LEAD FREE BRASS PRESS X PRESS BALL VALVE WITH A WASTE DRAIN

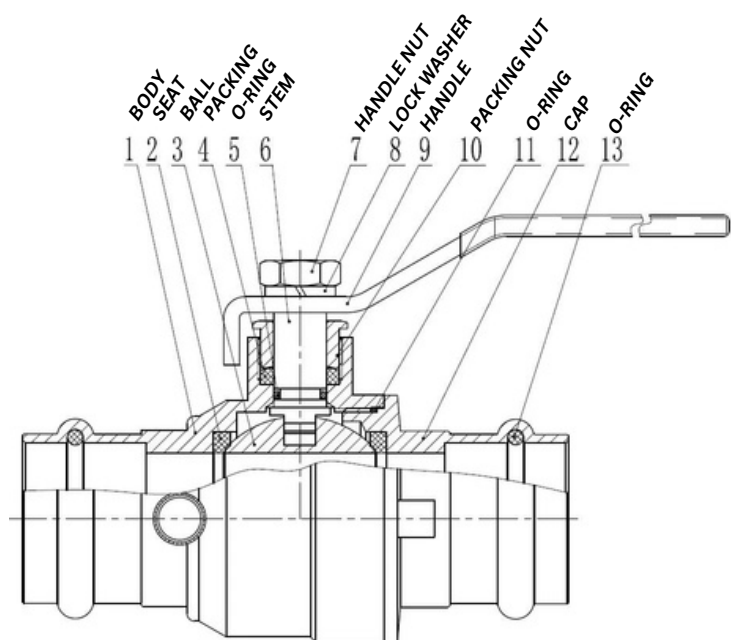

#### SPECIFICATION

LEAD FREE BRASS BODY

SIZES: 1/2"-1"

CONNECTION: PRESS X PRESS

CERTIFICATIONS: NSF/ANSI 61 NSF/ANSI 372 | UPC | LEAD FREE

PRESSURE: 250 PSI NON-SHOCK COLD WORKING PRESSURE

DIRECTION OF FLOW: IN BOTH WAYS

TEMPERATURE RANGE: MAX 250° F

APPLICATION: HOT AND COLD WATER SYSTEMS AND OTHER

NON-AGGRESSIVE FLUIDS

GREEN HANDLE

#### COMPONENTS

| N° | DESCRIPTION | MATERIAL        |
|----|-------------|-----------------|
| 1  | BODY        | LEAD FREE BRASS |
| 2  | SEAT        | PTFE            |
| 3  | BALL        | STAINLESS STEEL |
| 4  | PACKING     | PTFE            |
| 5  | O-RING      | NBR             |
| 6  | STEM        | BRASS           |
| 7  | HANDLE NUT  | PLATED STEEL    |
| 8  | LOCK WASHER | PLATED STEEL    |
| 9  | HANDLE      | PLATED STEEL    |
| 10 | PACKING NUT | BRASS           |
| 11 | O-RING      | NBR             |
| 12 | CAP         | LEAD FREE BRASS |
| 13 | O-RING      | EPDM            |
| 14 | SCREW       | BRASS           |
| 15 | GASKET      | EPDM            |

#### DIMENSIONS

INCHES

| CODE      | SIZE | D    | L    | H    | W    | Cv    |
|-----------|------|------|------|------|------|-------|
| 12417-005 | 1/2" | 0,59 | 3,46 | 1.81 | 3.35 | 18.55 |
| 12417-007 | 3/4" | 0.75 | 4.29 | 2.09 | 3.76 | 29.76 |
| 12417-010 | 1"   | 0,98 | 4,29 | 2.25 | 4.07 | 51.55 |