
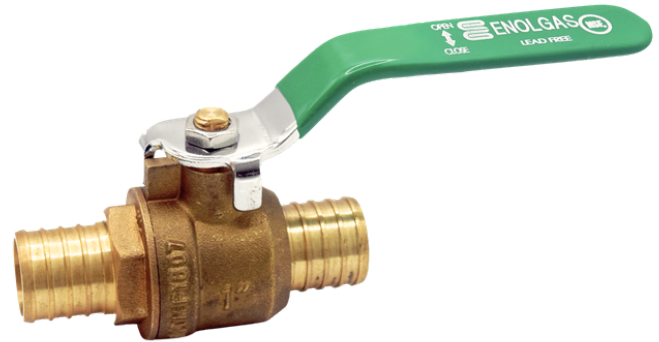


12414 SERIES

LEAD FREE BRASS PEX X PEX CRIMP/CINCH DOUBLE O-RING BALL VALVE

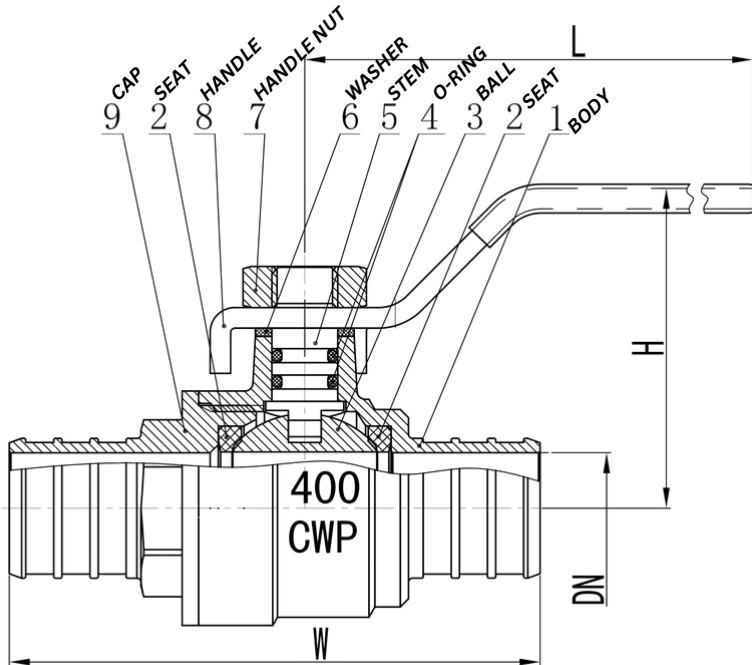

SPECIFICATION

LEAD FREE BRASS BODY
SIZES: 3/8"-2"
CONNECTION: PEX X PEX
CERTIFICATIONS: NSF/ANSI 61 NSF/ANSI 372 | UPC | LEAD FREE
PRESSURE: 100 PSI AT 180°F
DIRECTION OF FLOW: IN BOTH WAYS
TEMPERATURE RANGE: -4° F TO 266° F
APPLICATION: HOT AND COLD WATER, COMPRESSED AIR,
OILS, ALL KINDS OF GASES, NON-AGGRESSIVE FLUIDS
GREEN HANDLE

COMPONENTS

Nº	DESCRIPTION	MATERIAL
1	BODY	LEAD FREE BRASS
2	SEAT	PTFE
3	BALL	STAINLESS STEEL
4	O-RING	NBR
5	STEM	BRASS
6	WASHER	PTFE
7	HANDLE NUT	PLATED STEEL
8	HANDLE	PLATED STEEL
9	CAP	LEAD FREE BRASS

DIMENSIONS

						INCHES
CODE	SIZE	DN	W	H	L	
12414-003	3/8"	6	60.5	36	73.5	
12414-005	1/2"	9	60.5	36	73.5	
12414-007	3/4"	13.5	64.5	38.9	73.5	
12414-010	1"	18.1	78.4	45.1	109	
12414-012	1-1/4"	22.2	92	55.5	109	
12414-015	1-1/2"	26.5	109	60.5	143	
12414-020	2"	34.7	141.5	67	143	