
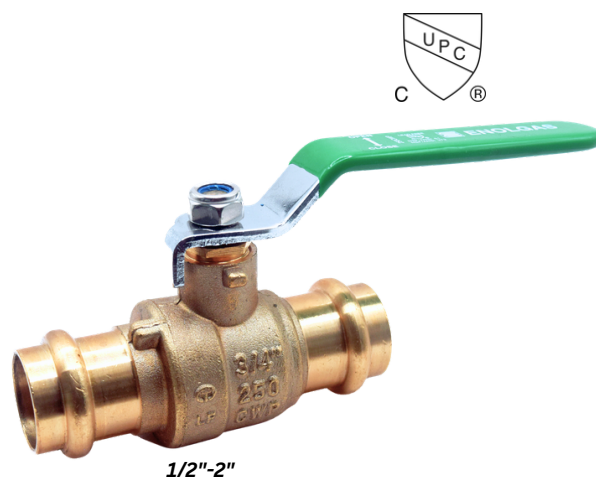
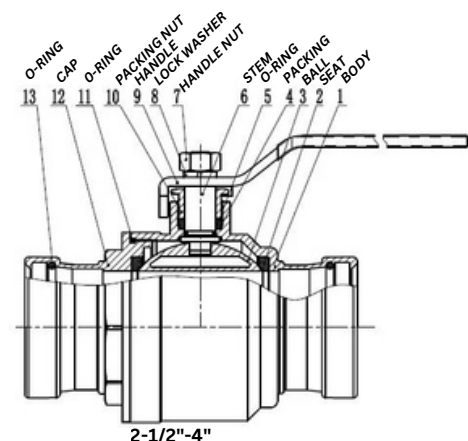


12416 SERIES

LEAD FREE BRASS PRESS X PRESS BALL VALVE, FULL PORT

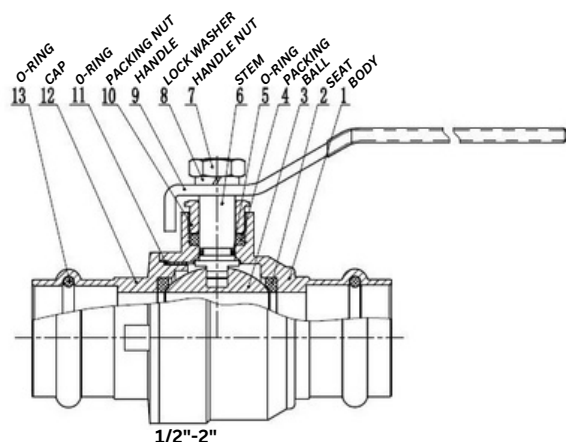

SPECIFICATION

LEAD FREE BRASS BODY

SIZES: 1/2"-4"

CONNECTION: PRESS X PRESS

CERTIFICATIONS: NSF/ANSI 61 NSF/ANSI 372 | UPC | LEAD FREE

PRESSURE: 250 PSI NON-SHOCK COLD WORKING PRESSURE

DIRECTION OF FLOW: IN BOTH WAYS

TEMPERATURE RANGE: MAX 250° F

APPLICATION: HOT AND COLD WATER SYSTEMS AND OTHER

NON-AGGRESSIVE FLUIDS

GREEN HANDLE

COMPONENTS

Nº	DESCRIPTION	MATERIAL
1	BODY	LEAD FREE BRASS
2	SEAT	PTFE
3	BALL	STAINLESS STEEL
4	PACKING	PTFE
5	O-RING	NBR
6	STEM	BRASS (1/2"-2") STAINLESS STEEL (2/1"-4")
7	HANDLE NUT	PLATED STEEL
8	LOCK WASHER	PLATED STEEL
9	HANDLE	PLATED STEEL
10	PACKING NUT	BRASS
11	O-RING	NBR
12	CAP	LEAD FREE BRASS
13	O-RING	EPDM

DIMENSIONS

CODE	SIZE	D	L	H	W	Cv
12416-005	1/2"	0,59	3,46	1.81	3.15	18.55
12416-007	3/4"	0.75	4.29	2.09	3.60	29.76
12416-010	1"	0,98	4,29	2.25	3.92	51.55
12416-012	1-1/4"	1.26	5.63	2.52	4.41	84.42
12416-015	1-1/2"	1,57	5.63	2.74	5.35	131.93
12416-020	2"	1,94	6.10	3.03	6.79	200.35
12416-025	2-1/2"	2.52	7.76	4.25	7.46	338.43
12416-030	3"	2.87	8.19	4.58	8.17	445.44
12416-040	4"	3.84	9.25	5.49	9.88	783.88

