

ENOLGAS
www.enolgasusa.com

Enolgas SafeFlex™ Total Gas System

18025 SERIES
PRESS X FEMALE ADAPTOR

Item# Submitted: _____
Job Name: _____
Location: _____
Engineer: _____
Contractor: _____
PO#: _____
TAG: _____

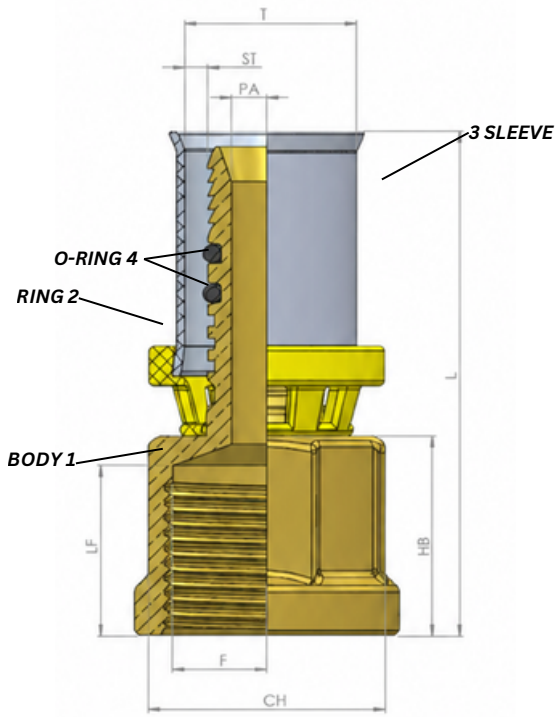

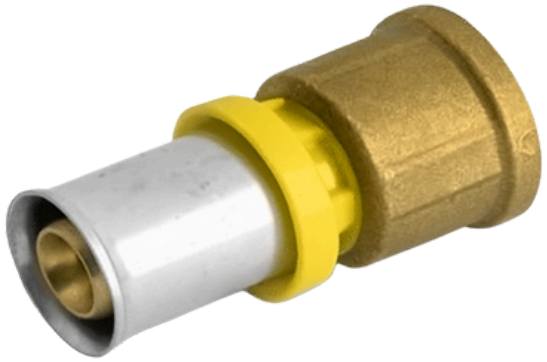

MADE IN ITALY

SPECIFICATION

BRASS BODY

SIZES: 16MM - 50MM

CONNECTION: PRESS x FEMALE THREAD (Rp/G BSP), STRAIGHT

FEMALE THREAD: 1/2" to 1" Rp UNI EN 10226
1-1/4" to 2" ISO 228/1

STANDARDS: UNI 11344, ISO 17484-1, UNI/TS 11343, UNI 7129, DM 16/04/08

MAX. OPERATING PRESSURE: 0.5 BAR

DIRECTION OF FLOW: IN BOTH WAYS

TEMPERATURE RANGE: -4°F TO 158°F

APPLICATION: DOMESTIC & COMMERCIAL GAS DISTRIBUTION (MULTILAYER PIPE SYSTEMS)

COMPONENTS

N°	DESCRIPTION	MATERIAL
1	BODY	BRASS (CW614N / CW617N)
2	RING	NYLON
3	SLEEVE	AISI 304 (STAINLESS STEEL)
4	O-RING	HNBR 70

TONGS DIAMETER

(Ø) TUBE	PROFILE
16	H – TH-U
20	H – TH-U
26	H – TH
32	H – TH-U
40	H – TH-U
50	TH
63	TH

DIMENSIONS — MM

CODE	SIZE (Ø)	ST	PA	L	LF	CH	H
18025-016-005	16 x 1/2"	2.0	7.00	50.50	16.00	24	21.00
18025-016-007	16 x 3/4"	2.0	7.00	50.00	15.50	30	20.50
18025-020-005	20 x 1/2"	2.0	10.00	49.50	16.00	24	20.00
18025-020-007	20 x 3/4"	2.0	10.00	50.00	15.50	30	20.50
18025-026-007	26 x 3/4"	3.0	14.60	52.00	17.50	30	22.50
18025-026-010	26 x 1"	3.0	14.60	55.00	19.50	40	25.00
18025-032-010	32 x 1"	3.0	20.00	60.50	19.50	40	25.50
18025-032-012	32 x 1-1/4"	3.0	20.00	66.50	24.00	50	24.00
18025-050-015	50 x 1-1/2"	4.0	34.50	78.50	21.00	56	28.50