


13600 SERIES - FLEXIBLE HOSE STAINLESS STEEL BRAID FLARE X FLARE

HOSE LENGTH NOT TO SCALE.

MANUFACTURED ACCORDING ISO 10380:2012.

PRODUCTS DELIVERED 100% LEAK TESTED AT 6 BAR FOR 120 SECONDS.

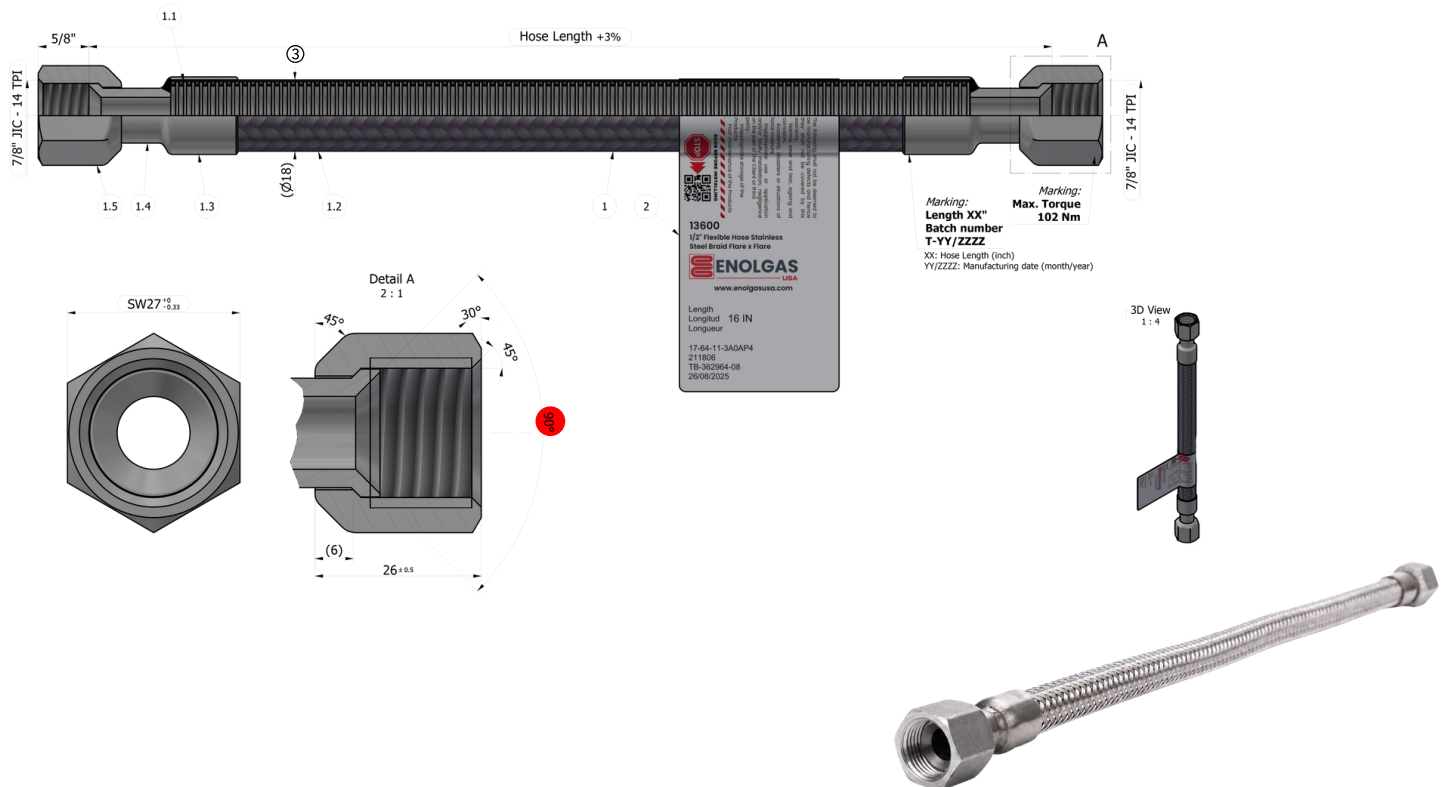

SPECIFICATION

CORRUGATED STAINLESS STEEL HOSE AISI 304 1/2"

END FITTINGS MATERIAL: STAINLESS STEEL AISI 304

BRAIDING: STAINLESS STEEL AISI 304

WORKING PRESSURE: 500 PSI (AMBIENT TEMPERATURE)

MAXIMUM OPERATING TEMPERATURE: 260°F (127°C)

SWIVEL NUTS: 7/8" JIC - 14TPI

MADE IN ITALY

COMPONENTS

Nº	DESCRIPTION	MATERIAL
1	PRESINOX-HG-7/8" JIC-OEM	CORRUGATED STAINLESS STEEL
2	LABEL DN13 ENOLGAS	POLYPROPYLENE (PP)
3	INNER HOSE	CORRUGATED STAINLESS STEEL AISI 304

DIMENSIONS

INCHES

CODE

SIZE

13600-005-016

1/2" x 16" Long

13600-005-018

1/2" x 18" Long

13600-005-020

1/2" x 20" Long

13600-005-022

1/2" x 22" Long

13600-005-024

1/2" x 24" Long

13600-005-034

1/2" x 34" Long