
ENOLGAS
www.enolgasusa.com

Enolgas SafeFlex™ Total Gas System

19002 SERIES
GAS CONNECTOR YELLOW COATED 1/2" OD

Item# Submitted: _____
Job Name: _____
Location: _____
Engineer: _____
Contractor: _____
PO#: _____
TAG: _____



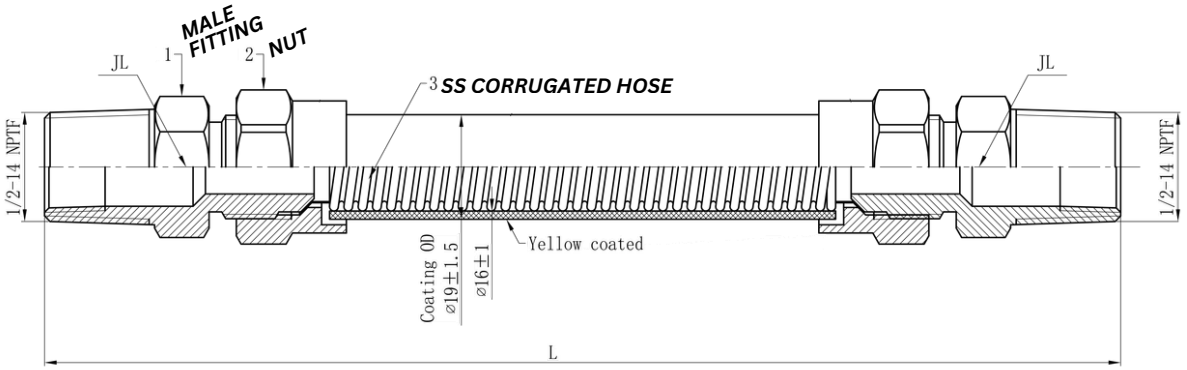

SPECIFICATION

YELLOW COATED PVC EXTERIOR

SIZES: 36", 48"

OUTER DIAMETER: 1/2" (SS CORRUGATED HOSE, PVC COATED)

COATING O.D.: Ø19mm ±1.5mm (≈0.75″ ±0.06″)

BORE (I.D.): Ø16mm ±1mm (≈0.63″ ±0.04″)

CONNECTION: MIP X FIP (1/2-14 NPT, BOTH ENDS)

CERTIFICATIONS:
CSA 259973, ANSI Z21.24, CSA 6.10, ANSI Z21.75, CSA 6.27 | UPC

COMPONENTS

N°	DESCRIPTION	MATERIAL
1	MALE FITTING	Q235 (A3) STEEL
2	NUT	Q235 (A3) STEEL
3	SS CORRUGATED HOSE	SS304 / PVC

DIMENSIONS — INCHES / MM

CODE	SIZE	LENGTH (L)	COATING O.D	BORE (I.D)
19002-005-005-360	1/2" x 1/2"	36"	Ø19mm ±1.5mm	Ø16mm ±1mm
19002-005-005-480	1/2" x 1/2"	48"	Ø19mm ±1.5mm	Ø16mm ±1mm