

ENOLGAS
www.enolgasusa.com

Enolgas SafeFlex™ Total Gas System

18050 SERIES
REDUCING TEE A 90°
PRESS X PRESS X PRESS

Item# Submitted: _____
Job Name: _____
Location: _____
Engineer: _____
Contractor: _____
PO#: _____
TAG: _____

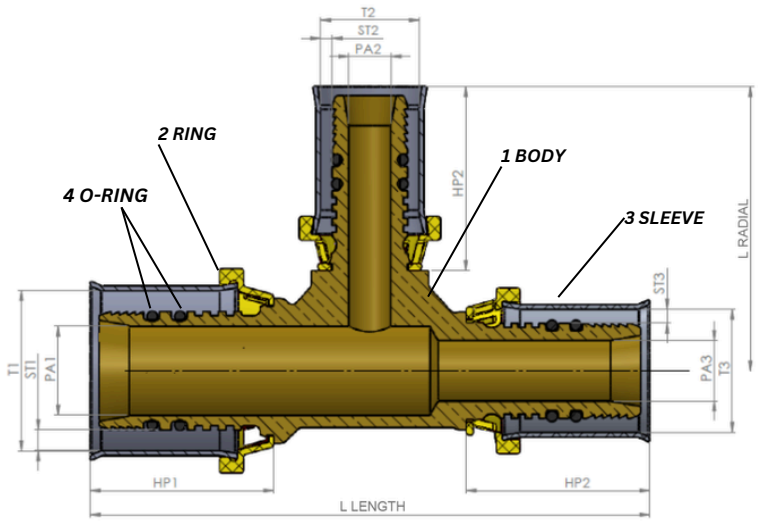

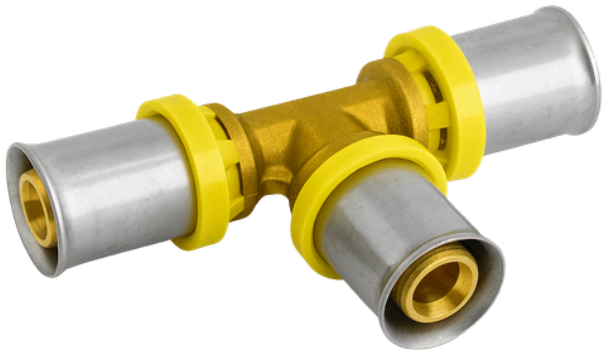

MADE IN ITALY

SPECIFICATION

BRASS BODY

SIZES: 16MM – 63MM (REDUCING BRANCH)

CONNECTION: PRESS x PRESS x PRESS, 90° REDUCING TEE

STANDARDS: UNI 11344, ISO 17484-1, UNI/TS 11343, UNI 7129, DM 16/04/08

MAX. OPERATING PRESSURE: 0.5 BAR

DIRECTION OF FLOW: IN BOTH WAYS

TEMPERATURE RANGE: -4°F TO 158°F

APPLICATION: DOMESTIC & COMMERCIAL GAS DISTRIBUTION (MULTILAYER PIPE SYSTEMS)

COMPONENTS

N°	DESCRIPTION	MATERIAL
1	BODY	BRASS (CW614N / CW617N)
2	RING	NYLON
3	SLEEVE	AISI 304 (STAINLESS STEEL)
4	O-RING	HNBR 70

TONGS DIAMETER

(Ø) TUBE	PROFILE
16	H – TH-U
20	H – TH-U
26	H – TH
32	H – TH-U
40	H – TH-U
50	TH
63	TH

DIMENSIONS MM

CODE	RUN INLET			BRANCH			RUN OUTLET			LL	LR
	T1 (Ø)	ST1	PA1	T2 (Ø)	ST2	PA2	T3 (Ø)	ST3	PA3		
18050-020-016-016	20	2.0	10.00	16	2.0	7.00	16	2.0	7.00	89.00	44.00
18050-020-016-020	20	2.0	10.00	16	2.0	7.00	20	2.0	10.00	89.00	44.00
18050-020-020-016	20	2.0	10.00	20	2.0	10.00	16	2.0	7.00	89.00	44.00
18050-026-016-026	26	3.0	14.60	16	2.0	7.00	26	3.0	15.00	91.50	45.50
18050-026-020-020	26	3.0	14.60	20	2.0	10.00	20	2.0	10.00	91.50	45.50
18050-026-020-026	26	3.0	14.60	20	2.0	10.00	26	3.0	15.00	91.50	45.50
18050-026-026-016	26	3.0	14.60	26	3.0	14.60	16	2.0	7.00	91.50	45.50
18050-026-026-020	26	3.0	14.60	26	3.0	14.60	20	2.0	10.00	91.50	45.50
18050-032-020-020	32	3.0	20.00	20	2.0	10.00	20	2.0	10.00	111.50	45.50
18050-032-020-032	32	3.0	20.00	20	2.0	10.00	32	3.0	20.00	116.00	53.00
18050-032-026-026	32	3.0	20.00	26	3.0	14.60	26	3.0	15.00	111.50	53.00
18050-032-026-032	32	3.0	20.00	26	3.0	14.60	32	3.0	20.00	116.00	53.00
18050-032-032-020	32	3.0	20.00	32	3.0	20.00	20	2.0	10.00	111.50	56.50
18050-032-032-026	32	3.0	20.00	32	3.0	20.00	26	3.0	15.00	111.50	56.50