


12415 SERIES

LEAD FREE BRASS PEX X PEX COLD EXPANSION BALL VALVE

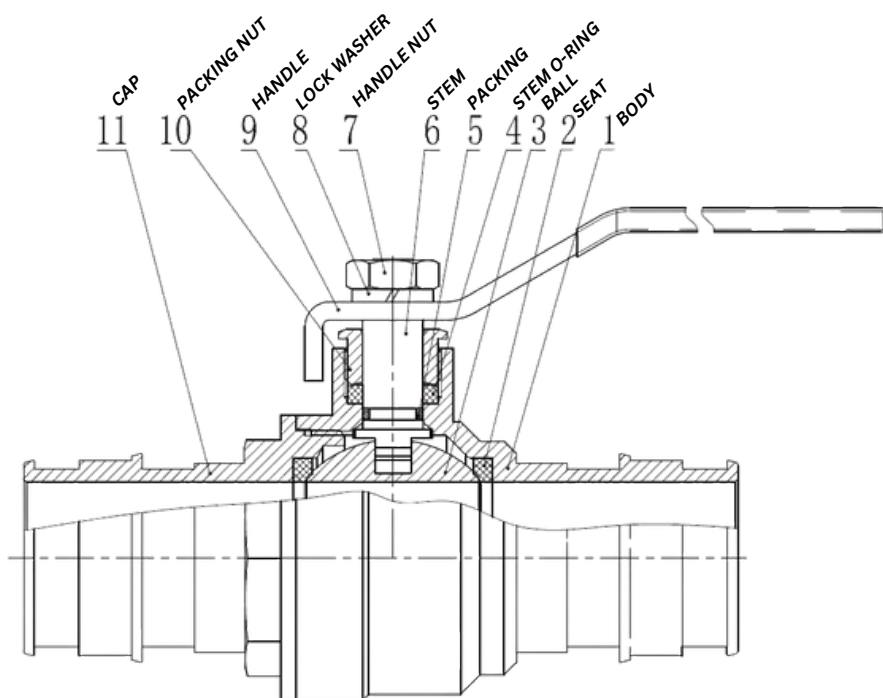

SPECIFICATION

LEAD FREE BRASS BODY

SIZES: 1/2"-2"

CONNECTION: PEX X PEX

CERTIFICATIONS: NSF/ANSI 61 NSF/ANSI 372 | UPC | LEAD FREE

PRESSURE: 400 PSI

DIRECTION OF FLOW: IN BOTH WAYS

TEMPERATURE RANGE: -4° F TO 266° F

APPLICATION: HOT AND COLD WATER, COMPRESSED AIR,
OILS, ALL KINDS OF GASES, NON-AGGRESSIVE FLUIDS
GREEN HANDLE

COMPONENTS

Nº	DESCRIPTION	MATERIAL
1	BODY	LEAD FREE BRASS
2	SEAT	PTFE
3	BALL	STAINLESS STEEL
4	STEM O-RING	NBR
5	PACKING	PTFE
6	STEM	BRASS
7	HANDLE NUT	PLATED STEEL
8	LOCK WASHER	PLATED STEEL
9	HANDLE	PLATED STEEL
10	PACKING NUT	BRASS
11	CAP	LEAD FREE BRASS

DIMENSIONS

INCHES

CODE	SIZE	D	L	H	W	Cv
12415-005	1/2"	0,39	3,46	1.69	2.58	8.23
12415-007	3/4"	0,61	3,46	1.81	3.31	19.80
12415-010	1"	0,81	4,29	2.09	3.98	34.98
12415-012	1-1/4"	0,98	4,29	2.25	4.65	51.55
12415-015	1-1/2"	1,10	5.63	2.45	5.52	64.64
12415-020	2"	1,58	5.63	2.74	6.91	131.92