

ENOLGAS
www.enolgasusa.com

Enolgas SafeFlex™ Total Gas System

18020 SERIES
PRESS X MALE ADAPTOR

Item# Submitted: _____
Job Name: _____
Location: _____
Engineer: _____
Contractor: _____
PO#: _____
TAG: _____

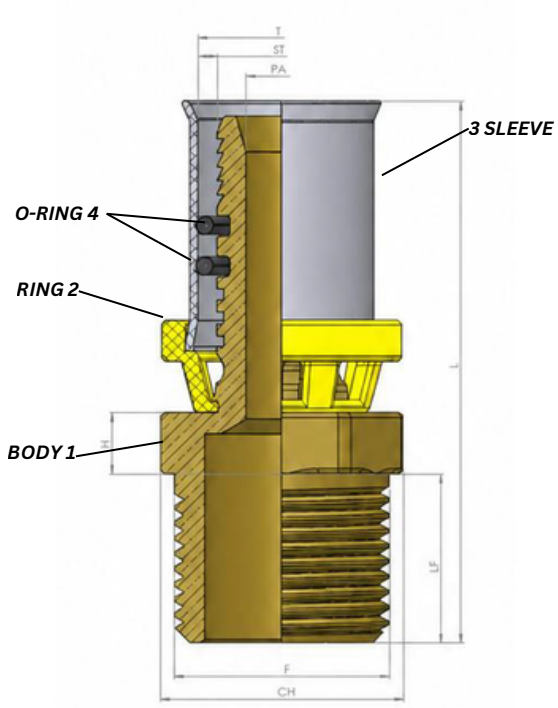

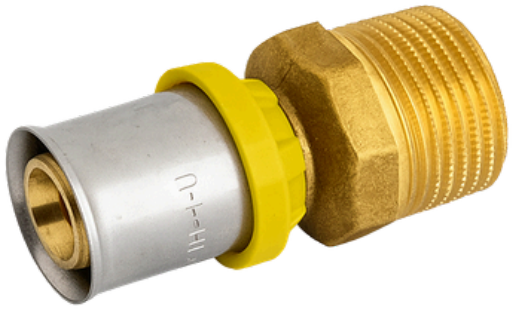

MADE IN ITALY

SPECIFICATION

- BRASS BODY
- SIZES: 16MM - 63MM
- CONNECTION: PRESS X MALE THREAD, STRAIGHT
- MALE THREAD: UNI EN 10226
- STANDARDS: UNI 11344, ISO 17484-1, UNI/TS 11343, UNI 7129, DM 16/04/08
- MAX. OPERATING PRESSURE: 0.5 BAR
- DIRECTION OF FLOW: IN BOTH WAYS
- TEMPERATURE RANGE: -4°F TO 158°F
- APPLICATION: DOMESTIC & COMMERCIAL GAS DISTRIBUTION (MULTILAYER PIPE SYSTEMS)

COMPONENTS

N°	DESCRIPTION	MATERIAL
1	BODY	BRASS (CW614N / CW617N)
2	RING	NYLON
3	SLEEVE	AISI 304 (STAINLESS STEEL)
4	O-RING	HNBR 70

TONGS DIAMETER

(Ø) TUBE	PROFILE
16	H – TH-U
20	H – TH-U
26	H – TH
32	H – TH-U
40	H – TH-U
50	TH
63	TH

DIMENSIONS — MM

CODE	SIZE (Ø)	ST	PA	L	LF	CH	H
18020-016-005	16 x 1/2"	2.0	7.00	53.00	15.00	22	6.00
18020-016-007	16 x 3/4"	2.0	7.00	55.50	16.00	28	7.00
18020-020-005	20 x 1/2"	2.0	10.00	51.00	15.00	21	6.00
18020-020-007	20 x 3/4"	2.0	10.00	55.50	16.00	28	7.00
18020-026-005	26 x 1/2"	-	-	-	-	-	-
18020-026-007	26 x 3/4"	3.0	15.00	55.50	16.50	28	8.00
18020-026-010	26 x 1"	3.0	15.00	60.00	19.50	35	8.00
18020-032-010	32 x 1"	3.0	20.00	64.50	19.50	35	8.00
18020-050-015	50 x 1-1/2"	4.0	34.50	83.50	22.50	48	11.00
18020-063-020	63 x 2"	4.5	44.00	94.50	23.00	62	13.00