
ENOLGAS
www.enolgasusa.com

Enolgas SafeFlex™ Total Gas System

19001 SERIES
SS GAS CONNECTOR YELLOW COATED 5/8" OD MIP X FIP

Item# Submitted: _____
Job Name: _____
Location: _____
Engineer: _____
Contractor: _____
PO#: _____
TAG: _____



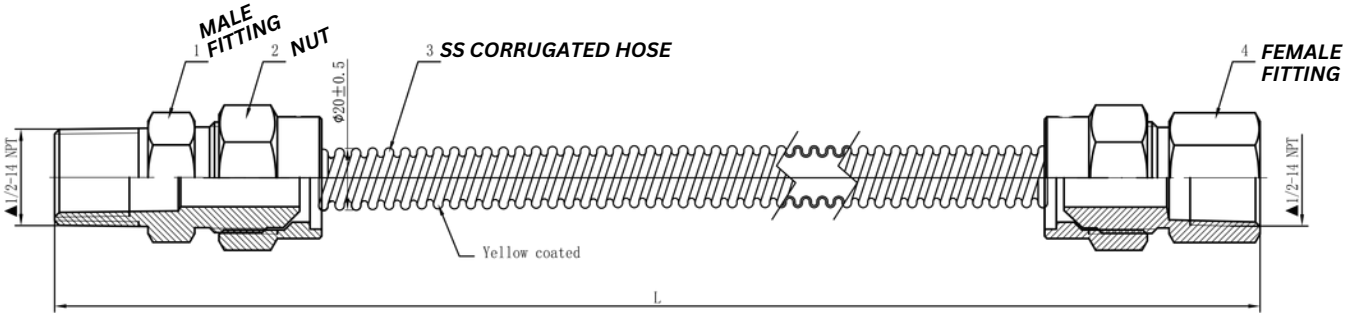

SPECIFICATION

YELLOW COATED EXTERIOR

SIZES: 36", 48", 60", 72"

OUTER DIAMETER: 5/8" (SS CORRUGATED HOSE)

BORE (I.D.): Ø20mm ±0.5mm (≈0.79″ ±0.02″)

CONNECTION: MIP X FIP (1/2-14 NPT, BOTH ENDS)

CERTIFICATIONS:
CSA 259973, ANSI Z21.24, CSA 6.10, ANSI Z21.75, CSA 6.27 | UPC

COMPONENTS

N°	DESCRIPTION	MATERIAL
1	MALE FITTING	Q235 (A3) STEEL
2	NUT	Q235 (A3) STEEL
3	SS CORRUGATED HOSE	SS304 (STAINLESS STEEL)
4	FEMALE FITTING	Q235 (A3) STEEL

DIMENSIONS — INCHES / MM

CODE	SIZE	LENGTH (L)	BORE (I.D)
19001-005-005-036	1/2" x 1/2"	36"	Ø20mm ±0.5mm
19001-005-005-048	1/2" x 1/2"	48"	Ø20mm ±0.5mm
19001-005-005-060	1/2" x 1/2"	60"	Ø20mm ±0.5mm
19001-005-005-072	1/2" x 1/2"	72"	Ø20mm ±0.5mm