
ENOLGAS
www.enolgasusa.com

Enolgas SafeFlex™ Total Gas System

18030 SERIES
COUPLING PRESS X PRESS

Item# Submitted: _____
Job Name: _____
Location: _____
Engineer: _____
Contractor: _____
PO#: _____
TAG: _____



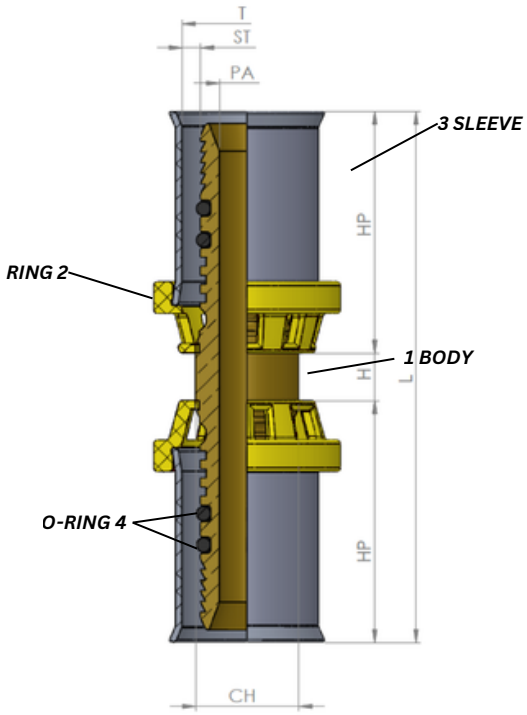

MADE IN ITALY

SPECIFICATION

- BRASS BODY
- SIZES: 16MM - 63MM
- CONNECTION: PRESS x PRESS, STRAIGHT COUPLING
- STANDARDS: UNI 11344, ISO 17484-1, UNI/TS 11343, UNI 7129, DM 16/04/08
- MAX. OPERATING PRESSURE: 0.5 BAR
- DIRECTION OF FLOW: IN BOTH WAYS
- TEMPERATURE RANGE: -4°F TO 158°F
- APPLICATION: DOMESTIC & COMMERCIAL GAS DISTRIBUTION (MULTILAYER PIPE SYSTEMS)

COMPONENTS

N°	DESCRIPTION	MATERIAL
1	BODY	BRASS (CW614N / CW617N)
2	RING	NYLON
3	SLEEVE	AISI 304 (STAINLESS STEEL)
4	O-RING	HNBR 70

TONGS DIAMETER

(Ø) TUBE	PROFILE
16	H – TH-U
20	H – TH-U
26	H – TH
32	H – TH-U
40	H – TH-U
50	TH
63	TH

DIMENSIONS MM

CODE	SIZE (Ø)	ST	PA	L	HP	CH	H
18030-016-016	16	2.0	7.00	65.00	29.50	13	6.00
18030-020-020	20	2.0	10.00	65.00	29.50	17	6.00
18030-026-026	26	3.0	14.60	65.00	29.50	22	6.00
18030-032-032	32	3.0	20.00	78.00	34.50	30	9.00
18030-050-050	50	4.0	34.50	116.00	50.00	48	16.00
18030-063-063	63	4.5	44.00	134.00	56.00	62	22.00