
ENOLGAS
www.enolgasusa.com

Enolgas SafeFlex™ Total Gas System

18046 SERIES
TEE A 90° PRESS X MALE THREADED TAKE-OFF

Item# Submitted: _____
Job Name: _____
Location: _____
Engineer: _____
Contractor: _____
PO#: _____
TAG: _____



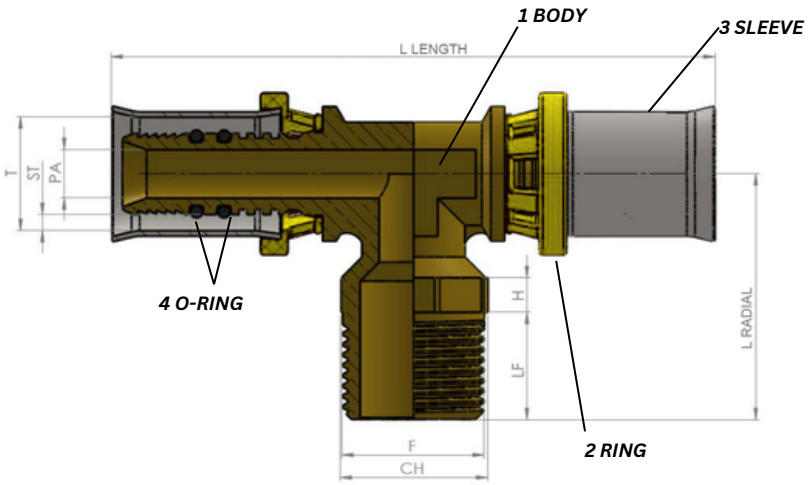

MADE IN ITALY

SPECIFICATION

- BRASS BODY
- SIZES: 16MM – 50MM
- CONNECTION: PRESS x PRESS x MALE THREAD (R BSP), 90° TEE
- MALE THREAD: UNI EN 10226
- STANDARDS: UNI 11344, ISO 17484-1, UNI/TS 11343, UNI 7129, DM 16/04/08
- MAX. OPERATING PRESSURE: 0.5 BAR
- DIRECTION OF FLOW: IN BOTH WAYS
- TEMPERATURE RANGE: -4°F TO 158°F
- APPLICATION: DOMESTIC & COMMERCIAL GAS DISTRIBUTION (MULTILAYER PIPE SYSTEMS)

COMPONENTS

N°	DESCRIPTION	MATERIAL
1	BODY	BRASS (CW614N / CW617N)
2	RING	NYLON
3	SLEEVE	AISI 304 (STAINLESS STEEL)
4	O-RING	HNBR 70

TONGS DIAMETER

(Ø) TUBE	PROFILE
16	H – TH-U
20	H – TH-U
26	H – TH
32	H – TH-U
40	H – TH-U
50	TH
63	TH

DIMENSIONS MM

CODE	SIZE	ST	PA	LF	LL	LR	CH	H
18046-016-005-016	16 x 1/2" x 16	2.0	7.00	15.00	85.50	35.50	21	5.00
18046-026-005-026	26 x 1/2" x 26	-	-	-	-	-	-	-
18046-026-007-026	26 x 3/4" x 26	3.0	14.60	16.50	92.00	39.00	28	5.00
18046-032-007-032	32 x 3/4" x 32	-	-	-	-	-	-	-
18046-032-010-032	32 x 1" x 32	3.0	20.00	19.50	118.50	52.50	35	8.00
18046-050-012-050	50 x 1-1/4" x 50	4.0	34.50	21.00	168.00	62	56	8.00
18046-050-015-050	50 x 1-1/2" x 50	4.0	34.50	21.00	168.00	62	56	8.00