


12412 SERIES

LEAD FREE BRASS BALL VALVE FULL PORT PRESS X PRESS - STEEL HANDLE

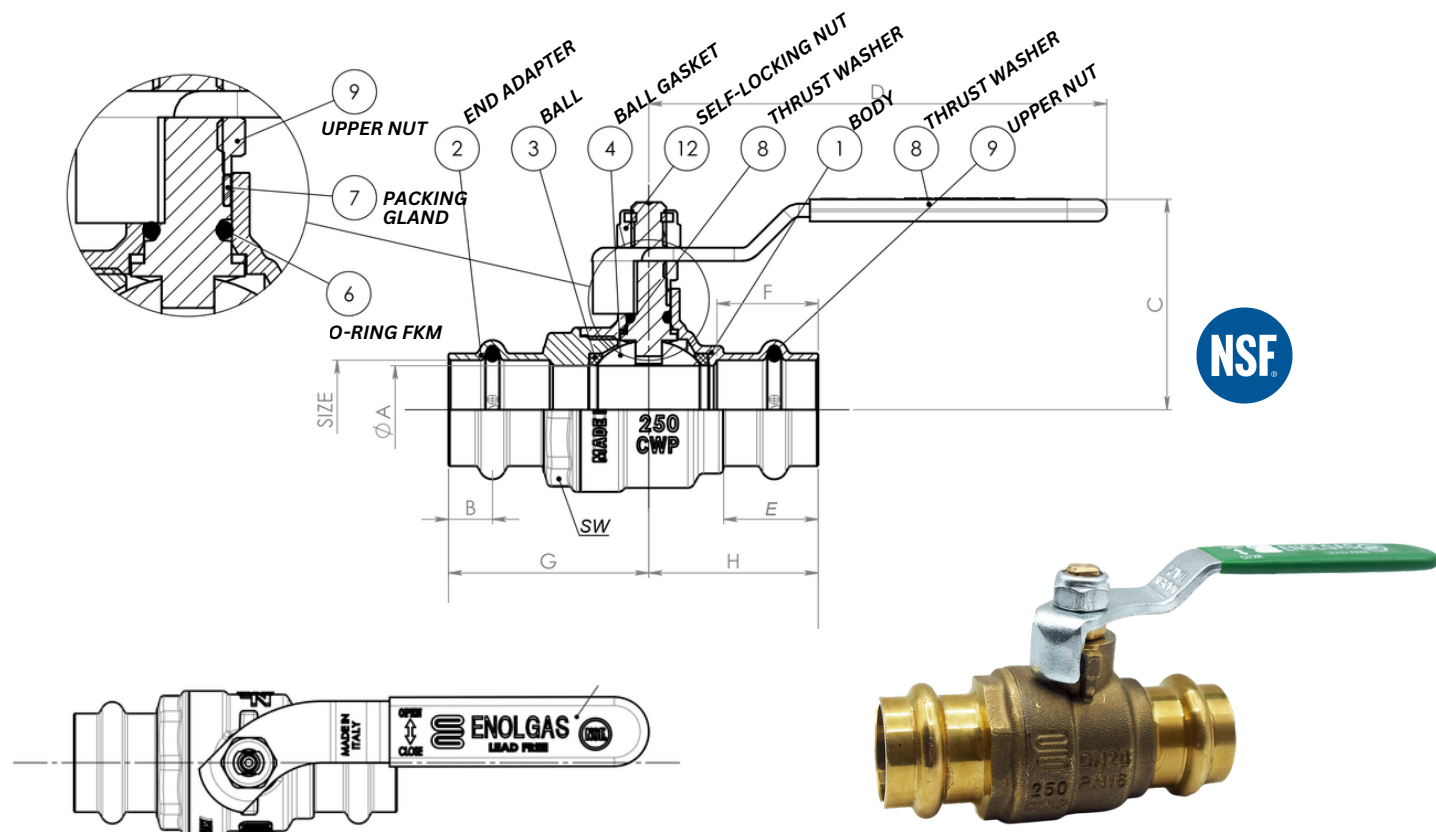

MADE IN ITALY

SPECIFICATION

LEAD FREE BRASS BODY
SIZES: 1/2"-2"
CONNECTION: PRESS X PRESS
CERTIFICATIONS: NSF | LEAD FREE
STANDARD: ANSI
PRESSURE: 250 PSI
DIRECTION OF FLOW: IN BOTH WAYS
TEMPERATURE RANGE: -4° F TO 266° F
APPLICATION: HOT AND COLD WATER, COMPRESSED AIR, OILS
GREEN HANDLE

COMPONENTS

N°	DESCRIPTION	MATERIAL
1	BODY	CW511L PB0,1%
2	END ADAPTER	CW511L PB0,1%
3	BALL	AISI304
4	BALL GASKET	PTFE
5	STEM	CW510L PB0,1%
6	O-RING FKM	FKM
7	PACKING GLAND	PTFE
8	THRUST WASHER	PTFE
9	UPPER NUT	CW614N
10	LEVER	STEEL
11	O-RING	EPDM PEROX
12	SELF-LOCKING NUT	STEEL

DIMENSIONS

CODE	SIZE	DN	øA	B	C	D	E	F	G	H	I	SW
12412-005	1/2"	0.59	0.59	0.31	1.61	3.54	0.67	0.71	1.48	1.20	2.68	0.98
12412-007	3/4"	0.79	0.79	0.39	1.83	4.13	0.83	0.91	1.79	1.52	3.31	1.26
12412-010	1"	0.98	0.98	0.39	1.99	4.13	0.83	0.94	1.99	1.71	3.70	1.54
12412-012	1-1/4"	1.26	1.26	0.39	2.56	5.51	0.83	1.02	2.17	2.01	4.17	1.85
12412-015	1-1/2"	1.57	1.57	0.49	2.80	5.51	1.02	1.42	2.66	2.58	5.24	2.17
12412-020	2"	1.97	1.97	0.59	3.31	6.69	1.18	1.57	3.09	3.03	6.12	2.64

INCHES