ENOLGAS
www.enolgasusa.com

Enolgas SafeFlex™ Total Gas System

18062 SERIES
CSST YELLOW TUBING

Item# Submitted: _____
Job Name: _____
Location: _____
Engineer: _____
Contractor: _____
PO#: _____
TAG: _____

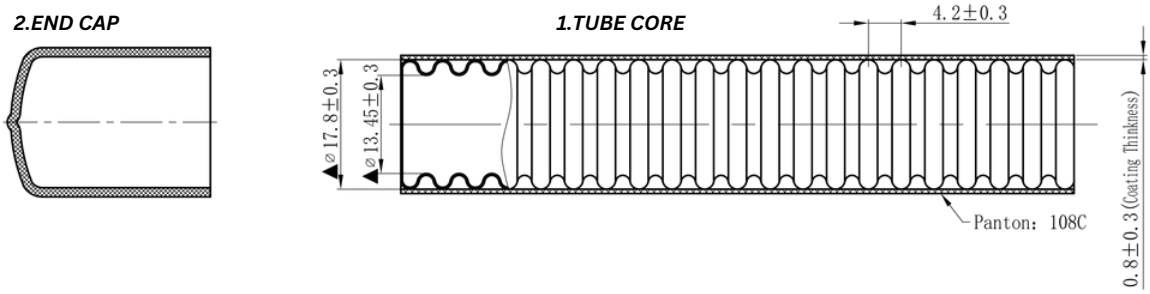



SPECIFICATION

CORRUGATED SS304L STAINLESS STEEL CORE, PE (POLYETHYLENE) EXTERIOR COATING TUBE
SIZES: 1/2" - 1"
COATING COLOR: YELLOW
COATING THICKNESS: 0.8mm ±0.3mm (ALL SIZES)
CERTIFICATIONS: CSA | UPC
APPLICATION: FUEL GAS
MAX. OPERATING PRESSURE: 25 PSI

COMPONENTS

N°	DESCRIPTION	MATERIAL
1	TUBE CORE	SS304L + PE COATING
2	END CAP / PLUG	-

DIMENSIONS

INCHES / MM / FEET

CODE	SIZE	OD (Ø)	ID (Ø)	CORRUGATION PITCH	EHD	COIL LENGTH
18062-005	1/2"	Ø17.8mm	Ø13.45mm	4.2mm	18	246'
18062-007	3/4"	Ø25.15mm	Ø20mm	4.8mm	23	246'
18062-010	1"	Ø33mm	Ø27.4mm	6.3mm	30	180'