
ENOLGAS
www.enolgasusa.com

Enolgas SafeFlex™ Total Gas System

18015 SERIES
ELBOW 90° PRESS X MALE THREADED TAKE-OFF

Item# Submitted: _____
Job Name: _____
Location: _____
Engineer: _____
Contractor: _____
PO#: _____
TAG: _____



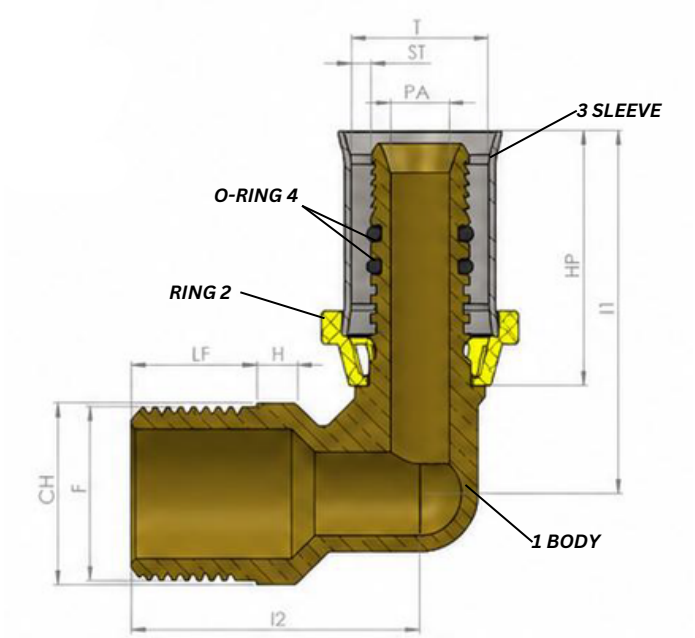

MADE IN ITALY

SPECIFICATION

- BRASS BODY
- SIZES: 16MM - 50MM
- CONNECTION: PRESS X MALE THREAD, 90° BEND
- MALE THREAD: UNI EN 10226
- STANDARDS: UNI 11344, ISO 17484-1, UNI/TS 11343, UNI 7129, DM 16/04/08
- MAX. OPERATING PRESSURE: 0.5 BAR
- DIRECTION OF FLOW: IN BOTH WAYS
- TEMPERATURE RANGE: -4°F TO 158°F
- APPLICATION: DOMESTIC & COMMERCIAL GAS DISTRIBUTION (MULTILAYER PIPE SYSTEMS)

COMPONENTS

N°	DESCRIPTION	MATERIAL
1	BODY	BRASS (CW614N / CW617N)
2	RING	NYLON
3	SLEEVE	AISI 304 (STAINLESS STEEL)
4	O-RING	HNBR 70

TONGS DIAMETER

(Ø) TUBE	PROFILE
16	H – TH-U
20	H – TH-U
26	H – TH
32	H – TH-U
40	H – TH-U
50	TH
63	TH

DIMENSIONS — MM

CODE	SIZE (Ø)	ST	PA	HP	LF	I1	I2	CH	H
18015-016-005	16 x 1/2"	2.0	7.00	29.50	15.00	42.50	34.50	24	5.00
18015-016-007	16 x 3/4"	2.0	7.00	29.50	15.50	45.00	35.00	24	5.00
18015-020-005	20 x 1/2"	2.0	10.00	29.50	15.00	43.50	35.00	30	5.00
18015-020-007	20 x 3/4"	2.0	10.00	29.50	16.00	45.00	39.00	30	6.50
18015-026-007	26 x 3/4"	3.0	14.60	29.50	15.00	47.00	36.50	40	-
18015-032-007	32 x 3/4"	3.0	20.00	34.50	16.50	56.00	42.00	30	5.00
18015-032-010	32 x 1"	3.0	20.00	34.50	20.50	58.00	53.00	40	6.50
18015-050-015	50 x 1-1/2"	4.0	35.50	50.00	22.50	84.50	67.50	56	8.00