

ENOLGAS
www.enolgasusa.com

Enolgas SafeFlex™ Total Gas System

18040 SERIES
TEE A 90° - PRESS X PRESS X PRESS

Item# Submitted: _____
Job Name: _____
Location: _____
Engineer: _____
Contractor: _____
PO#: _____
TAG: _____

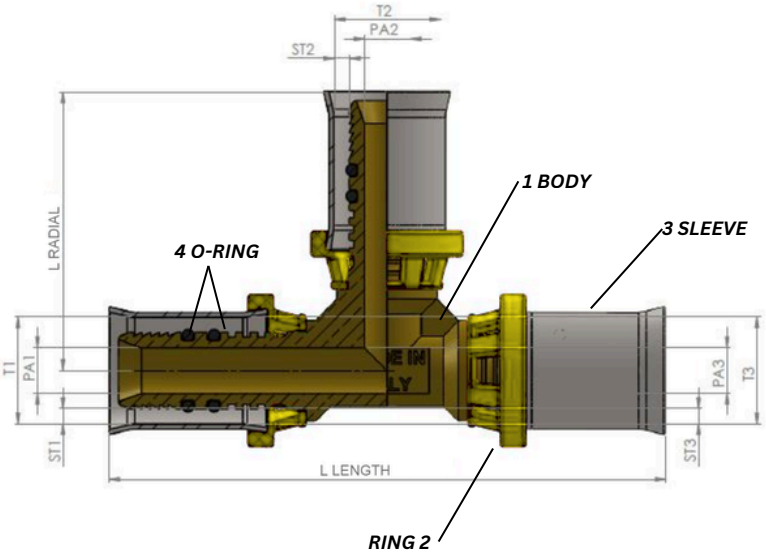

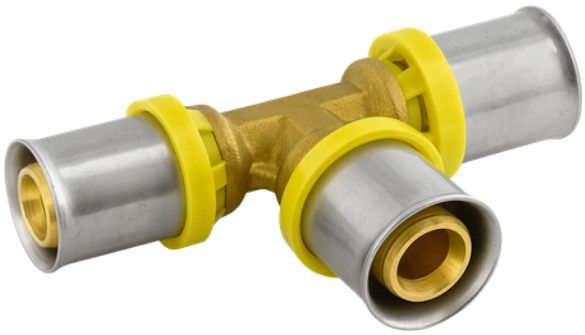

MADE IN ITALY

SPECIFICATION

- BRASS BODY
- SIZES: 16MM - 50MM
- CONNECTION: PRESS x PRESS x PRESS, 90° TEE
- STANDARDS: UNI 11344, ISO 17484-1, UNI/TS 11343, UNI 7129, DM 16/04/08
- MAX. OPERATING PRESSURE: 0.5 BAR
- DIRECTION OF FLOW: IN BOTH WAYS
- TEMPERATURE RANGE: -4°F TO 158°F
- APPLICATION: DOMESTIC & COMMERCIAL GAS DISTRIBUTION (MULTILAYER PIPE SYSTEMS)

COMPONENTS

N°	DESCRIPTION	MATERIAL
1	BODY	BRASS (CW614N / CW617N)
2	RING	NYLON
3	SLEEVE	AISI 304 (STAINLESS STEEL)
4	O-RING	HNBR 70

TONGS DIAMETER

(Ø) TUBE	PROFILE
16	H – TH-U
20	H – TH-U
26	H – TH
32	H – TH-U
40	H – TH-U
50	TH
63	TH

DIMENSIONS — MM

CODE	SIZE (T1=T2=T3)	ST	PA	LL	LR	CH
18040-016-016-016	16	2.0	7.00	84.50	42.00	11
18040-020-020-020	20	2.0	10.00	89.00	44.00	14
18040-026-026-026	26	3.0	14.60	91.00	45.50	20
18040-032-032-032	32	3.0	20.00	116.50	57.50	24
18040-050-050-050	50	4.0	35.50	172.00	86.00	39
18040-063-063-063	63	4.5	44.00	207.00	98.00	50