
ENOLGAS
www.enolgasusa.com

# Enolgas SafeFlex™ Total Gas System


## 19005 SERIES
## SS STATIONERY COMMERCIAL GAS CONNECTOR - YELLOW COATED


Item# Submitted: _____
Job Name: _____
Location: _____
Engineer: _____
Contractor: _____
PO#: _____
TAG: _____

1/2"

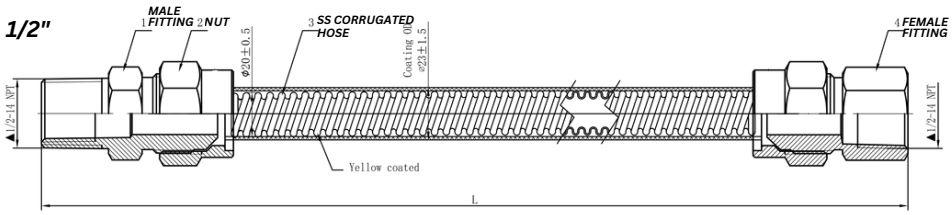


3/4"

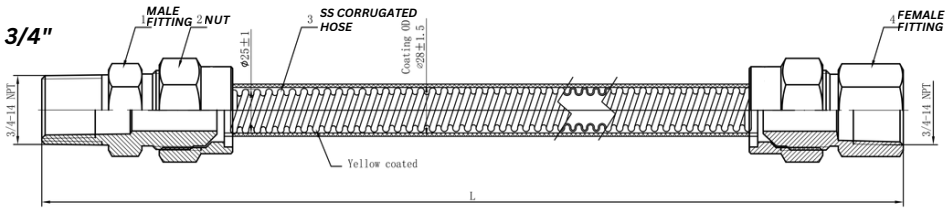
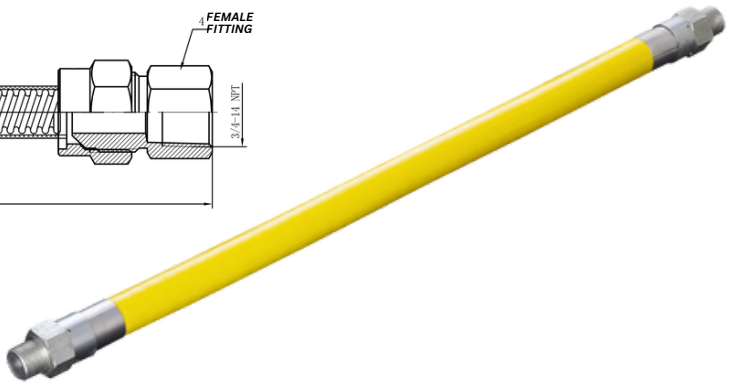
## SPECIFICATION

YELLOW COATED EXTERIOR

SIZES: 36", 48", 60", 70"

OUTER DIAMETER: Available in 1/2" or 3/4"

COATING O.D.: VARIES BY SIZES - SEE CHART BELOW

BORE (I.D.): VARIES BY SIZES - SEE CHART BELOW

CONNECTION: MIP X FIP

CERTIFICATIONS:
CSA 259973, ANSI Z21.24, CSA 6.10, ANSI Z21.75, CSA 6.27 | UPC

## COMPONENTS

| N° | DESCRIPTION | MATERIAL |
|---|---|---|
| 1 | MALE FITTING | Q235 (A3) STEEL |
| 2 | NUT | Q235 (A3) STEEL |
| 3 | SS CORRUGATED HOSE | SS304 (STAINLESS STEEL) |
| 4 | FEMALE FITTING | Q235 (A3) STEEL |

## DIMENSIONS — INCHES / MM

| CODE | SIZE | THREAD | LENGTH (L) | COATING O.D | BORE (I.D) |
|---|---|---|---|---|---|
| 19005-005-005-036 | 1/2" x 1/2" | 1/2-14 NPT | 36" | Ø23mm ±1.5mm | Ø20mm ±0.5mm |
| 19005-005-005-048 | 1/2" x 1/2" | 1/2-14 NPT | 48" | Ø23mm ±1.5mm | Ø20mm ±0.5mm |
| 19005-007-007-036 | 3/4" x 3/4" | 3/4-14 NPT | 36" | Ø28mm ±1.5mm | Ø25mm ±1mm |
| 19005-007-007-048 | 3/4" x 3/4" | 3/4-14 NPT | 48" | Ø28mm ±1.5mm | Ø25mm ±1mm |
| 19005-007-007-060 | 3/4" x 3/4" | 3/4-14 NPT | 60" | Ø28mm ±1.5mm | Ø25mm ±1mm |
| 19005-007-007-072 | 3/4" x 3/4" | 3/4-14 NPT | 72" | Ø28mm ±1.5mm | Ø25mm ±1mm |